

ASR

DUMPING SPIRAL MIXER ON TWO SIDES

MIXER
ART OF MIXING


PROFESSIONAL

CAPACITY (kg)

- 200 ▪ 300
- 250



TECHNICAL FEATURES

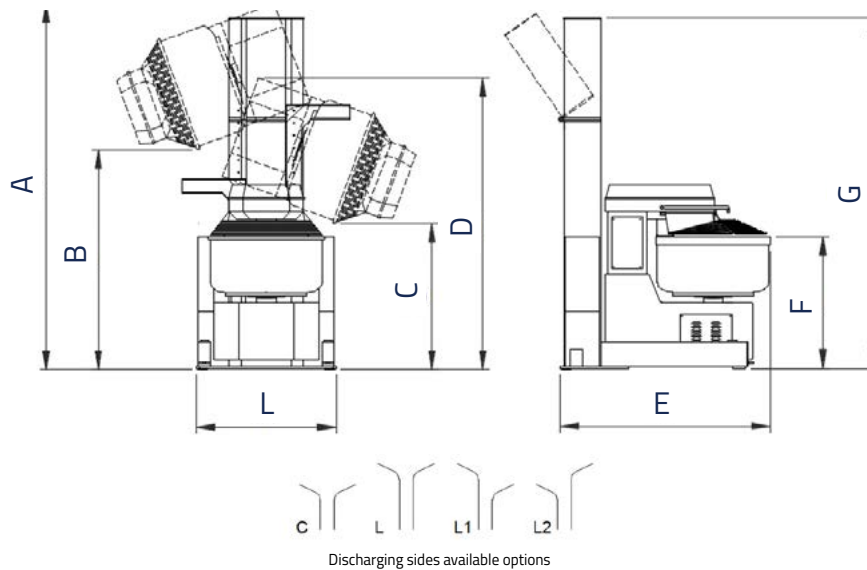

TECHNICAL DATA

MODEL		ASR 200	ASR 250	ASR 300
Dough capacity (min./max) *	kg	10/200	15/250	20/300
Flour capacity (min./max) *	kg	6/125	9/150	12/185
Water capacity (min./max) *	lt	4/75	6/100	8/115
Bowl volume	lt	285	380	470
% water/flour minimum	%	50	50	50
Spiral turns 1st / 2nd speed (50/60Hz)	rpm	86/170	86/170	86/170
Bowl turns 1st / 2nd speed (50/60Hz)	rpm	9/18	9/18	9/18
Motors power 1st/2nd speed	kw	4.6/7.4	7.1/12.1	7.1/12.1
Current drawn V 230/400	A	27.5/16	44/26	44/26
Spiral bar diameter	mm	48	60	60
Total height (machine during discharging phase "L")	A mm	3000	3000	3000
Maximum discharging height	B mm	1780	1780	1730
Minimum discharging height	C mm	1180	1130	1080
Total height (Machine in discharge with lifters in C model)	D mm	2400	2400	2400
Total depth	E mm	1710	1820	1920
Height from bowl edge (machine to the ground)	F mm	1010	1040	1060
Total height (machine to the ground)	G mm	2840	2840	2840
Total width	L mm	1150	1150	1150
Net weight	Kg	1580	1670	1720

*: capacity determined in view of % liquid/flour equal to 60.

All data are to be considered as nominal, MIXER srl reserves the right to make any changes to the product and/or technical specifications without notice.

STANDARD FEATURES

- Painted steel structure.
- Possibility to dump the bowl on table (1,2 m approx.) or on divider (1.7 m approx.) on right and left (to specify together with premises height).
- Hydraulic lifting system.
- Stainless steel bowl, spiral tool, contrast column and security guard.
- Two independent motors with two-speed for spiral and bowl.
- Bowl's motion given by pulleys and V-belts.
- Bowl thrust rollers.
- Commands on mobile panels with two timers, setting of work time with automatic shift from 1st to 2nd speed.
- Selector to reverse bowl movement.
- Impulse buttons to rotate the bowl and remove product.
- Selector to activate second bowl speed.
- Right/Left dumping selector.
- Dumping control with hold-to-run buttons.

ON REQUEST

- Special voltage/frequency 30/50/3 220/60/3 380/60/3.
- Wooden crate packaging.