

# DRAGO 890



**890/124**




**890/62**

- *N° 1 steamer for each deck  
(ovens width = 62 excluded: 1 steamer every 2 decks)*
- *Baking plates in "fibre-cement"*
- *Hood with exhaust fan*
- *Chimney silencer and soundproof panels in the bench.*
- *Safety thermostat*
- *Anticorrosion kit (i.e. Steam generators heads and connecting pipes)*
- *Doors with low emission dismountable glass*
- *Steam control with electrovalve with timer (SIMPLE excluded)*
- *Automatic start (excluding SIMPLE)*
- *Baking timer (excluding SIMPLE)*

<i>Power inlet</i>	400/3N~50
<i>Water inlet</i>	Ø ¾" GAS
<i>Steamer drain</i>	Ø 1" GAS
<i>Fuel pipe inlet</i>	-----
<i>Steam exhaust output</i>	DR. 62 Ø 150 mm DR. 124 Ø 250 mm *
<i>Fume exhaust pipe</i>	Ø 150 mm

\*Minimum diameter pipe exhaust fumes 200 mm.

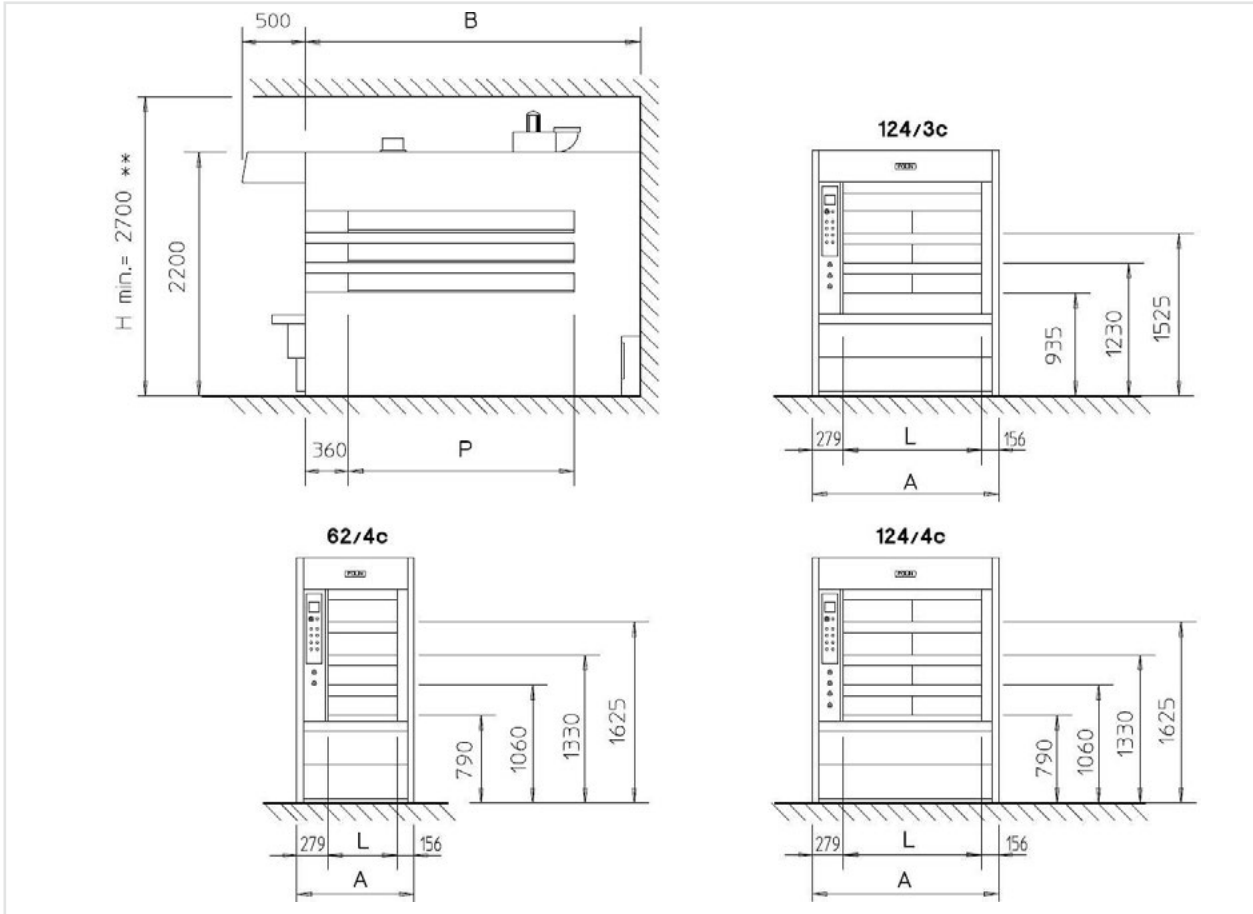

\*\* 2800 with a 2 speed motor

	Baking Surface	Chambers	Useful Dimension Chambers		Overall dimensions		Installed power	
			Width	Depth	Width	Depth	Thermic	Electrical
	mq	n°	L mm	P mm	A mm	B mm	kcal/hx1000	kW
<b>4,2/62x170-4</b>	4,2	4	620	1700	1055	2680	41	2,3
<b>5,3/62x214-4</b>	5,3	4	620	2140	1055	3120	45	2,3
<b>6,4/62x258-4</b>	6,4	4	620	2580	1055	3560	49	2,3
<b>6,3/124x170-3</b>	6,3	3	1240	1700	1675	2680	55	3,9
<b>8,4/124x170-4</b>	8,4	4	1240	1700	1675	2680	70	3,9
<b>8,0/124x214-3</b>	8,0	3	1240	2140	1675	3120	65	3,9
<b>10,6/124x214-4</b>	10,6	4	1240	2140	1675	3120	75	3,9
<b>9,6/124x258-3</b>	9,6	3	1240	2580	1675	3560	75	3,9
<b>12,8/124x258-4</b>	12,8	4	1240	2580	1675	3560	78	3,9