


DRAGO 890 TWIN



- N° 1 steamer for each deck (ovens width = 62 excluded: 1 steamer every 2 decks)
- Baking plates in "fibre-cement"
- Hoods with exhaust fan
- Chimney silencer and soundproof panels in the bench.
- Safety thermostat
- Anticorrosion kit (i.e. Steam generators heads and connecting pipes)
- Doors with low emission dismountable glass
- Steam generators control by electrovalve with timer (SIMPLE excluded)
- Automatic start (excluding SIMPLE)
- Baking timer (excluding SIMPLE)

<i>Power inlet</i>	400/3N~/50
<i>Water inlet</i>	Ø ¾" GAS
<i>Steamer drain</i>	Ø 1" GAS
<i>Fuel pipe inlet</i>	-----
<i>Steam exhaust pipe</i>	DR. 62 Ø 150 mm DR. 124 Ø 250 mm*
<i>Fume exhaust pipe</i>	Ø 150 mm

* Minimum diameter pipe exhaust fumes 200 mm.

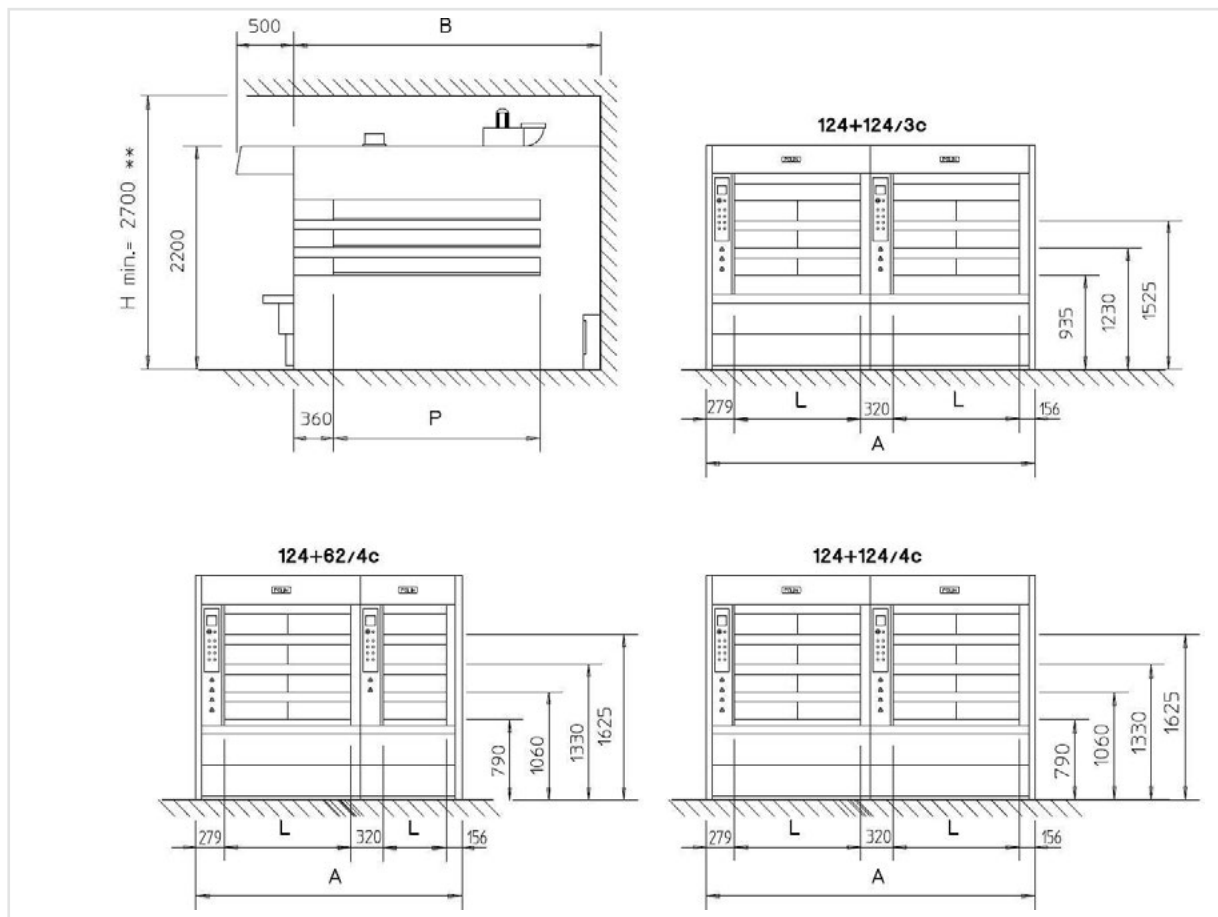

** 2800 with a 2 speed motor

	Baking Surface	Chambers	Useful Dimension Chambers		Overall dimensions		Installed power	
			Width	Depth	Width	Depth	Thermic	Electrical
	mq	n°	L mm	P mm	A mm	B mm	kcal/hx1000	kW
12,6(62+124)x170-4	12,6	4+4	1860	1700	2615	2680	111	6,2
15,9(62+124)x214-4	15,9	4+4	1860	2140	2615	3120	120	6,2
19,2(62+124)x258-4	19,2	4+4	1860	2580	2615	3560	127	6,2
12,6(124+124)x170-3	12,6	3+3	2480	1700	3235	2680	110	7,8
16,8(124+124)x170-4	16,8	4+4	2480	1700	3235	2680	140	7,8
16,0(124+124)x214-3	16,0	3+3	2480	2140	3235	3120	130	7,8
21,2(124+124)x214-4	21,2	4+4	2480	2140	3235	3120	150	7,8
19,2(124+124)x258-3	19,2	3+3	2480	2580	3235	3560	150	7,8
25,6(124+124)x258-4	25,6	4+4	2480	2580	3235	3560	156	7,8