


# DRAGO 895



- N° 1 steamer for each deck
- Baking plates in "fibre-cement"
- Hood with exhaust fan
- Chimney silencer and soundproof panels in the bench
- Safety thermostat
- Doors with low emission dismountable glass
- Steam generators control by electrovalve with timer (SIMPLE excluded)
- Automatic start (excluding SIMPLE)
- Baking timer (excluding SIMPLE)

<i>Power inlet</i>	400/3N~/50
<i>Water inlet</i>	Ø ¾" GAS
<i>Steamer drain</i>	Ø 1" GAS
<i>Fuel pipe inlet</i>	-----
<i>Steam exhaust uotput</i>	Ø 250 mm (*)
<i>Fume exhaust pipe</i>	Ø 200 mm

(\*) Minimum diameter pipe exhaust fumes 200 mm

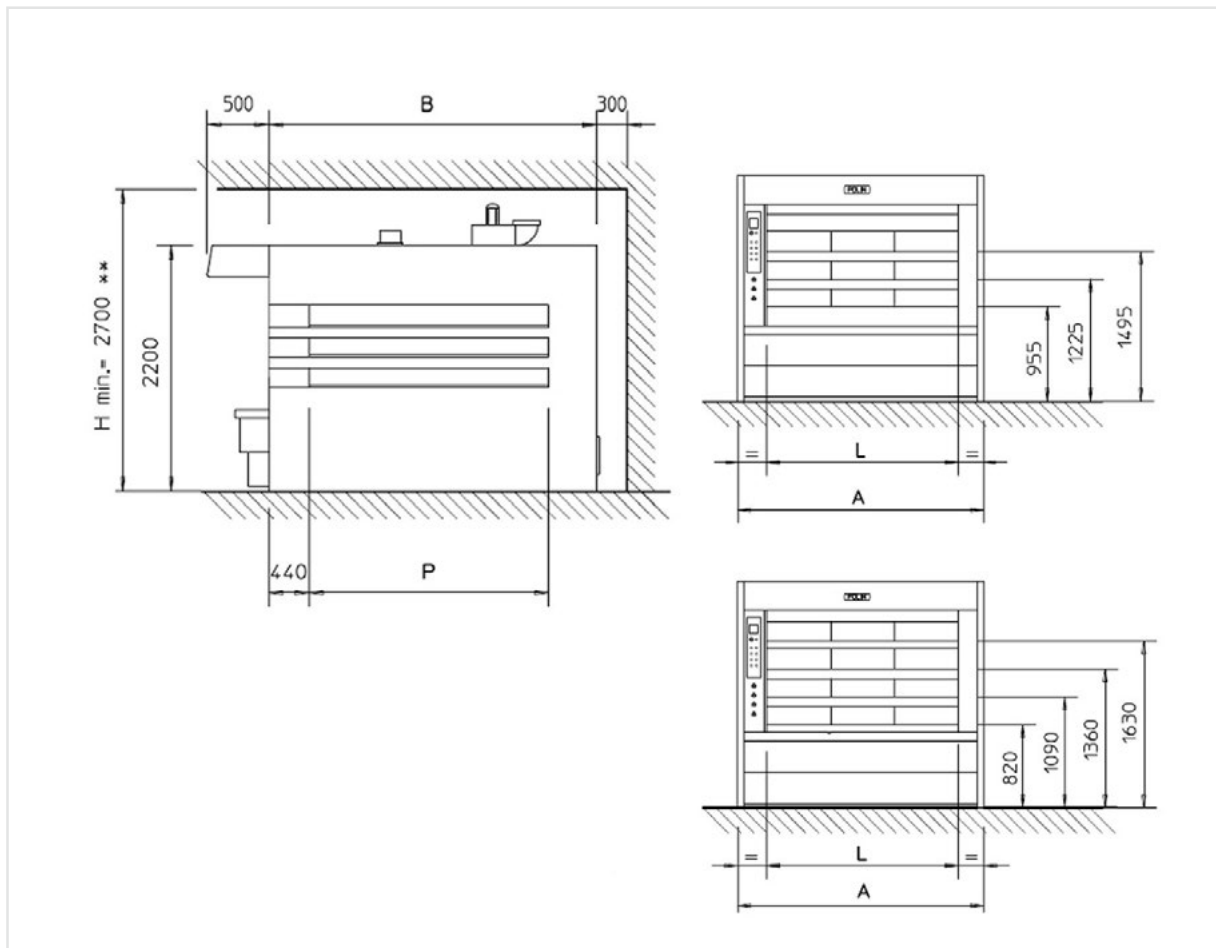

\*\* 2800 with a 2 speed motor

	Baking Surface	Chambers	Useful Dimension Chambers		Overall dimensions		Installed power	
			Width	Depth	Width	Depth	Thermic	Electrical
	mq	n°	L mm	P mm	A mm	B mm	kcal/hx1000	kW
<b>9,4/186x170-3</b>	9,4	3	1860	1700	2595	3000	90	4,8
<b>12,5/186x170-4</b>	12,5	4	1860	1700	2595	3000	89	4,8
<b>12/186x214-3</b>	12	3	1860	2140	2595	3440	90	4,8
<b>16/186x214-4</b>	16	4	1860	2140	2595	3440	89	4,8
<b>14/186x258-3</b>	14	3	1860	2580	2595	3880	90	4,8
<b>19/186x258-4</b>	19	4	1860	2580	2595	3880	89	4,8